

Dreiphasen-Drosseln


Selfs triphasées

**Wechselstrom
offene Bauart**

Anschlüsse Klemmen, Cu-Schienen etc.
Isolationsklasse T40 / F

**Courant alternatif
Modèle ouvert**

Connexions bornes, profilé Cu etc.
Classe d'isolation T40 / F

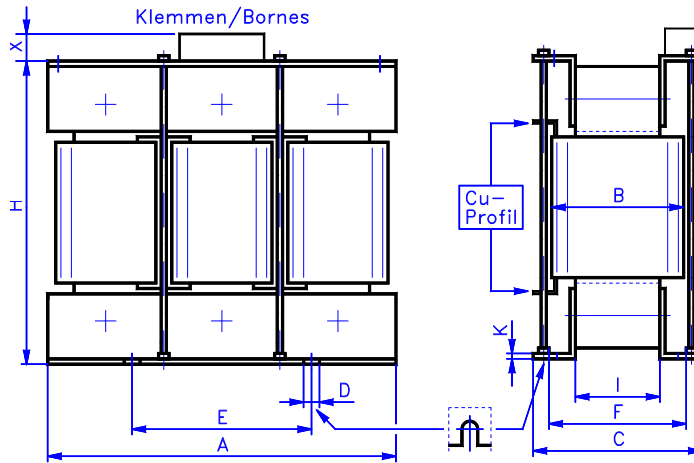

Leist'g Puiss. kVAr	Kerngrösse Dimension du noyau	Indukt. Induct. mH	Strom Courant A	Abmessungen in mm (* = ca.) Dimensions en mm (* = ca.)											Gew. Poids kg
				A	B*	C*	D	E	F	H*	I	K	X		
...	E 320/70	385	150	162	13	200	140	330	70	4	...	64	
...	E 320/75	385	155	167	13	200	145	330	75	4	...	69	
...	E 320/80	385	160	172	13	200	150	330	80	4	...	75	
...	E 320/90	385	170	182	13	200	160	330	90	4	...	82	
...	E 320/100	385	180	192	13	200	170	330	100	4	...	89	
...	E 320/120	385	200	212	13	200	190	330	120	4	...	102	
...	E 375/85	450	170	197	13	230	165	385	85	4	...	110	
...	E 375/95	450	180	207	13	230	175	385	95	4	...	119	
...	E 375/105	450	190	217	13	230	185	385	105	4	...	128	
...	E 375/120	450	205	232	13	230	200	385	120	4	...	140	
...	E 375/130	450	215	242	13	230	210	385	130	4	...	150	
...	E 375/150	450	240	262	13	230	230	385	150	4	...	171	
...	E 450/100	540	220	232	13	280	190	462	100	5	...	190	
...	E 450/115	540	235	247	13	280	205	462	115	5	...	208	
...	E 450/125	540	245	257	13	280	215	462	125	5	...	220	
...	E 450/140	540	260	272	13	280	230	462	140	5	...	240	
...	E 450/160	540	280	292	13	280	250	462	160	5	...	265	
...	E 450/180	540	300	312	13	280	270	462	180	5	...	294	
...	E 550/110	660	280	274	13	340	220	566	110	6	...	315	
...	E 550/125	660	295	290	13	340	235	566	125	6	...	346	
...	E 550/140	660	310	304	13	340	250	566	140	6	...	377	
...	E 550/160	660	330	324	13	340	270	566	160	6	...	410	
...	E 550/180	660	350	344	13	340	290	566	180	6	...	450	
...	E 550/200	660	370	364	13	340	310	566	200	6	...	492	
...	E 650/150	780	310	314	13	400	260	626	150	6	...	520	
...	E 650/170	780	330	334	13	400	280	626	170	6	...	565	
...	E 650/190	780	350	354	13	400	300	626	190	6	...	610	
...	E 650/210	780	370	374	13	400	320	626	210	6	...	660	
...	E 650/240	780	400	404	13	400	350	626	240	6	...	735	
...	E 650/270	780	430	434	13	400	380	626	270	6	...	810	
...	E 650/300	780	460	464	13	400	410	626	300	6	...	890	

Mass X je nach Klemmenart
Mass- und Ausführungsänderungen vorbehalten
Preise auf Anfrage

Mesure X selon le type de bornes
Petites variations de cotes et modifications réservées
Prix sur demande